

Extreme Duty Breathers

Ideal for harsh environments

Specifications

- Automotive grade housing and solid standpipe design offer increased vibration resistance and temperature range
- Three layers of protection to 0.3 micron absolute
- Internal check valve system

Ideal for ...

- Harsh environments
- Mobile equipment
- Nautical applications



Benefits

- Eliminates rust-forming condensation
- Prevents sludge deposits and water-contaminated oil
- Provides longer oil and filter life
- Reduces wear and tear on equipment, prolongs life

Every element of Des-Case's Extreme Duty Disposable Breathers has been designed to take contamination control to a whole new level, standing up to a wide variety of applications in challenging environments.


The breather is outfitted with a rugged housing and an integrated standpipe, allowing for decreased oil misting while offering improved vibration resistance. Visual indicator windows show the desiccant as it changes color, indicating that the breather should be replaced. Check valves keep out ambient humidity while the system is at rest.

Des-Case extreme-duty breathers attack the cause of contamination, keeping dirt and water where it belongs – out of your equipment.

*Keeping contamination
under control.®*

How it works:

As wet, contaminated air is drawn through the unit, multiple 0.3 micron filter elements remove solid particulate and the color-indicating silica gel extracts moisture. When air is expelled from the container, the top foam pad prevents oil mist from contacting silica gel or entering the atmosphere. The hydrophilic agent is partially reactivated by the dry air passing back through.

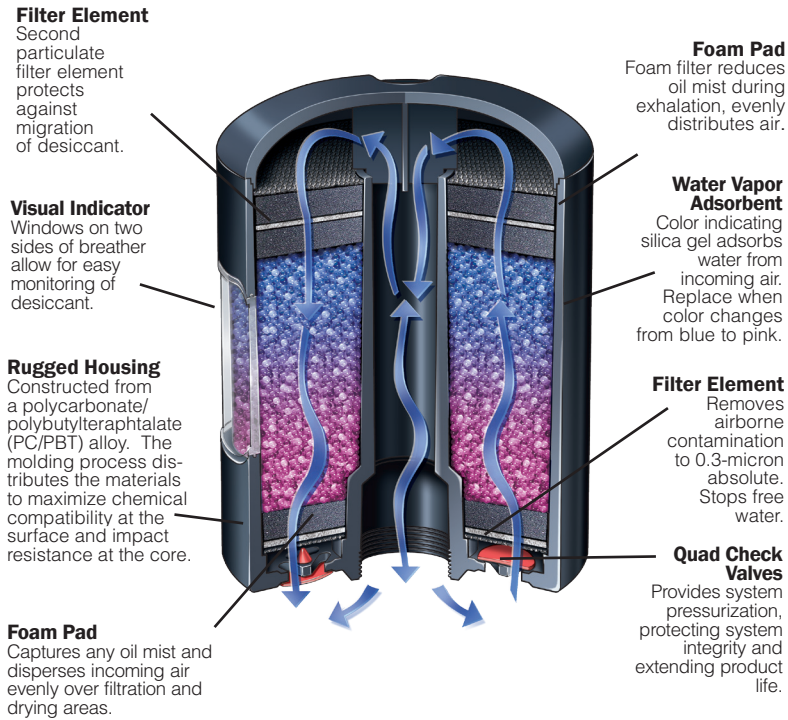

| Product Specifications | | DC-XD-6 |
|-----------------------------|-------|--|
| Unit Height | | 6.51" / 165.4 mm |
| Unit Diameter | | 5.1" / 129.5 mm |
| Shipping Weight (unit/case) | | 3.03 lbs. / 19.97 lbs. 1.37 kg / 9.06 kg |
| Amount of Silica Gel | | 1.75 lbs. / 0.79 kg |
| Adsorption Capacity | | 10.65 fl. oz. / 315 mL |
| Max. Flow Rate | (cfm) | 16 @ 1 PSID |
| | (lpm) | 456 |
| Filtration | | 0.3µ absolute ($\beta_{0.3} > 200$) |
| Operating Temp. Range | | -40°F to 300°F -40°C to 148.89°C |
| Hydrophilic Agent | | Silica gel |
| Filter Media | | ePTFE |
| Connection Size | | 1 1/2" x 16 UN female thread |
| Body Material | | Polycarbonate/Polybutylteraphtalate (PC/PBT), Polytetrafluoroethylene, Aluminum, Polyurethane, Polycarbonate |

Adapters

Des-Case provides a range of accessories for easy adaptation to your specific application and working environment.

Contact us at (615) 672-8800 or at sales@descase.com to learn more.

| Extreme Duty Breather Adapters | | |
|--------------------------------|---|---|
| Adapter Part Number | Description | Application Connection Type/Size Number |
| DC-DSA-17 | Connects Extreme Duty Breather to a 1 1/2" x 16 UN male threaded connection. | 3/4" Threaded Female |
| DC-DSA-10 | Connects Extreme Duty Breather to a 1 1/2" x 16 UN male threaded connection. | 1" Threaded Female |
| DC-XDVA-12M | Vent Valve Adapter connects Extreme Duty Breather to a 1 1/2" x 16 UN male threaded connection. | 3/4" Threaded Female |
| DC-XDVA-16M | Vent Valve Adapter connects Extreme Duty Breather to a 1 1/2" x 16 UN male threaded connection. | 1" Threaded Female |

FA-ST Ltd.

**Unit 4 Foxwood Road, Dunston Trading Est.
Chesterfield Derbyshire. S41 9RF**

Tel. 01246 268900

www.fa-st.co.uk

sales@fa-st.co.uk